Compact Top Loading Autoclaves - 63 litre models



Fitted with 'Heaters in Chamber' as standard.

Self Contained with a Small Footprint

Astell's top loading 63 litre 'Compact' autoclaves are available in two versions (see below). Both require no plumbing, and operate from a standard single phase power supply.

'Classic' and 'Autofill' models are available.

Classic - The 'Classic' version requires manual water-fill and during the cycle condensate leaves the vessel via a silicone tube that can be connected to a heat-resistant bottle.

Autofill - The 'Autofill' version has an integral reservoir. Once filled, this provides water for up to 15 cycles, and also acts as a collection vessel for condensate and the water that is automatically returned from the chamber at the end of each cycle.



Technical Details

Model No.	Classic/ Autofill	Volume (Litres)	Power Supply	Chamber dia x depth mm	Overall Dims wxhxd	Duran Bottle Capacities		
						500ml	1000ml	2000ml
AMA440BT	Classic	63	Single Phase 230 volts,	350 × 640	530 x 1040 x 700	16	10	6*
AMA240BT	Autofill		13 Amps, 50/60Hz				12	

*will hold 8 Durans if no baskets are used, but requires an additional load support plate (REF: AAN074)

Additional options available

Pr	Integral Data Printer	Astell Ref: AAR130	Ba	Stainless Steel Basket 310 (dia) x 270 (h) mm	Astell Ref: AAN340
Ls	Load Sensed Process Timing	Astell Ref: AAR014	Mc	Morrison Discard Container 310 (dia) x 270 (h) mm	Astell Ref: AAN342
Rs	RS232 Interface	Astell Ref: AAR120			-
Et	Ethernet Interface	Astell Ref: AAR122	Pictured right, the condensate bottle can be connected to any of the 'Classic'		
Iq	IQ/OQ Documentation	Astell Ref: IQ/OQ		t units to allow up to 4 litres of ollection during the freesteaming	0.10
Ac	Assisted Air Cooling	Astell Ref: AAP007	This option is useful in situations where no easy drainage is available,		
Cb	Condensate Bottle for 'Classic' models only	Astell Ref: AAN308		lower cost alternative to the l' version(s).	
Pl	Load Support Plate	Astell Ref: AAN074			

Colour touch screens as standard

All Astell Scientific autoclaves, steam generators and effluent decontamination systems (EDS) incorporate the latest innovations in control system technology, providing colour touchscreen controllers as standard throughout the range.

The Logi control colour systems are an advance in sterilization control technology. Bringing together years of unrivalled experience, they produce a user friendly, fully automatic control system designed to meet and exceed the expectations of the most demanding laboratories and centres of sterilization.

The controller consists of a wipe clean touch screen measuring 122mm x 94mm and is based on an industrial PLC system, combined with a number of analogue and digital input/output modules. The controller software has been developed by Astell for the precision control of all our autoclaves and sterilizers.



Standard Features

Colour Touch Screen Icon Driven Menu System Simple Cycle Selection Continual Cycle Monitoring



SECURE

Data Archive for up to 5,000 cycles USB Connection for USB back up (requires additional lead) Multiple user access levels Multi-level password protection User log



FLEXIBLE

Multi programmable controller
Programme new cycles
Modify existing cycles
Duplicate, modify & rename cycles
Cycle jump facility
Multiple languages
Delayed start facility
Hold warm facility (if applicable)
Default to factory settings
Input / output override



INFORMATIVE

Digital pressure / temperature display Cycle counter

Stage timer

Stage tille

Cycle timer

Cycle header

Stage display

Pressure display

Up to four temperatures displayed

View input / output display

Logs batch number

Logs load number


Print any cycle from the data archive logs (printer required)



SUPPORTIVE

Self-help tutorial Fault diagnosis Safety valve test cycle Machine service timer Fault history log



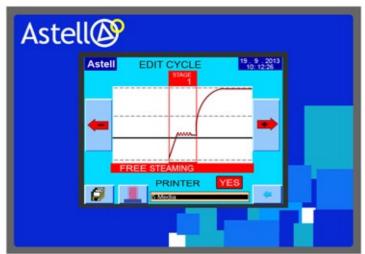

Pictured Right:

Electro polished pressure vessels come as standard on all our circular chambered autoclaves, allowing for easy cleaning.

