

# DIAPHRAGM VACUUM PUMP LABOPORT® N 840.3 FT.18

DATA SHEET E 264



## Technical features

- 100% oil-free transfer – thereby pure transferring, evacuation and compression of gases
- High level of vapor and condensate compatibility
- TFM™ PTFE pump head combined with PTFE-coated diaphragm are ideal for extremely aggressive/corrosive gases and vapors
- ATEX compliant according to ATEX II 2G IIB+H2 T3X internal atmosphere only
- Environmentally friendly
- High level of gas tightness
- Also available with an integrated gas ballast valve: N 840.3 FT.18 G

## Technical data

Flow rate [m³/h] at atm. pressure	2.04
Flow rate [l/min] at atm. pressure	34
Ultimate vacuum [mbar abs.]	8.0 ≤ 12.0 with gas ballast valve in use
Operating pressure [bar]	1
Voltage [V]	230
Frequencies [Hz]	50
Motor protection	IP 44
Power P <sub>1</sub> [W]	245
Operating current [A]	1.5
With thermal switch and power fuse	
Motors with other voltages and frequencies on request	

## MATERIALS

Pump head	TFM™ PTFE
Diaphragm	PTFE-coated
Valves	FFPM

## OTHER DATA


Weight [kg]	12.6
Hose connections	ID 10
Dimensions W x H x D [mm]	166 x 226 x 341
Permissible media and ambient temperature [°C]	+5 to +40

## ACCESSORIES

	ID
Spares kit	057359


## Dimensions

N 840.3 FT.18

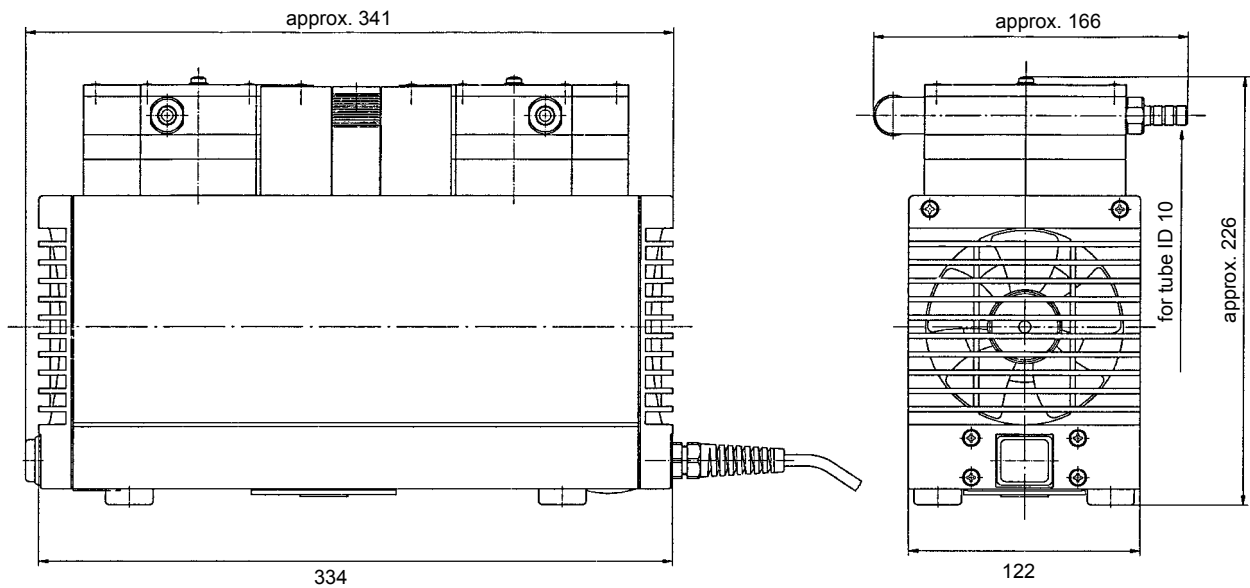

## Performance characteristics

PUMP DOWN TIME FOR 10 LITER RECEIVER

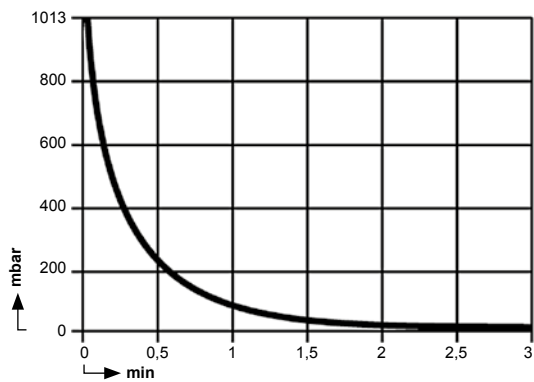

FLOW CAPACITY

