




Stopcocks, regulating taps, polypropylene



- Efficient polypropylene stopcocks
- Excellent chemical and temperature resistance

Item Code	Thread size BSP	Pack qty.
SWQ036	3/8"	1
SWQ038	1/2"	1
SWQ040	3/4"	1

 Remove rubber sealing ring prior to autoclaving.





Stopcocks, 2 way & 3 way, PVDF or Polyethylene



- Range of two and three way stopcocks on PVDF or polyethylene
- PVDF has excellent temperature, chemical and ageing resistance
- Polyethylene available for less stringent requirements

Item Code	Material	Type	For tube I.D. mm	Pack qty.
SWQ216	PVDF	2-way	10-11	1
SWQ218	PVDF	3-way	6-7	1
SWQ220	PVDF	3-way	8-9	1
SWQ224	PVDF	3-way	10-11	1
SWQ200	Polyethylene	2-way	6-7	1
SWQ202	Polyethylene	2-way	8-9	1
SWQ204	Polyethylene	2-way	10-11	1
SWQ206	Polyethylene	3-way	6-7	1
SWQ208	Polyethylene	3-way	8-9	1
SWQ210	Polyethylene	3-way	10-11	1

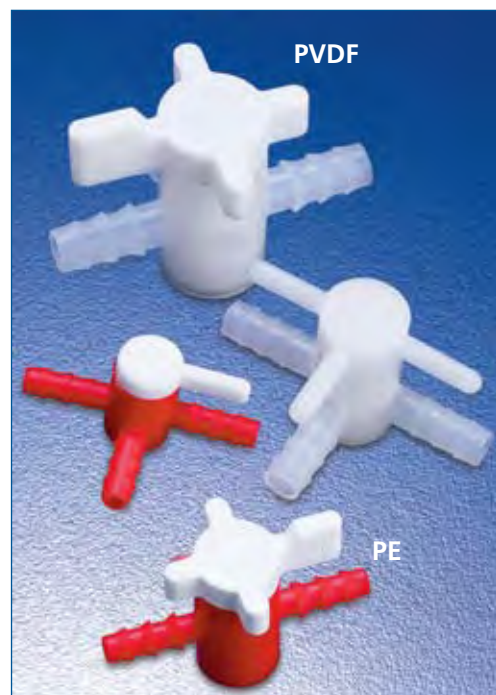

 Polyvinylidene fluoride (PVDF) can be used up to 150°C and has chemical resistance approaching that of PTFE.