



The first address for Titration

TITRONIC®300 and TitroLine® 5000

Distributed By:

Camlab Limited

Camlab House, Norman Way Industrial Estate, Over, Cambridge CB24 5WE, UK

E: sales@camlab.co.uk

T: +44 1954 233110



SI Analytics

a **xylem** brand

Selection table titration –piston burettes TITRONIC®

and automatic titrators TitroLine®

The most important features of titrators TitroLine®and piston burettes TITRONIC®at a glance

Application	TITRONIC®300	TITRONIC®500	TitroLine®5000	TitroLine®6000	TitroLine®7000	TitroLine®7500 KF	TitroLine®7500 KF trace	TitroLine®7750
Intelligent interchangeable units (5, 10, 20 and 50 ml)	1)	■	1)	■	■	■	■	■
Manual titration	■	■	■	■	■	—	—	■
Dosing	■	■	■	■	■	■	—	■
Solutions preparation (manually or automatically with connected balance)	—	■	—	■	■	■	—	■
Automatic titration (independent with external software)	2)	2)	■	■	■	■	■	■
pH/mV titrations „aqueous“ (Alkalinity, hydrochloric acid, citric acid, Kjeldahl...)	—	—	■	■	■	—	—	■
pH/mV titrations „non aqueous“ (TAN/TBN, FFA, titrations with perchloric acid...)	—	—	—	—	■	—	—	■
Redox titrations (iodometry, permanganometry....	—	—	■	■	■	—	—	■
Redox titrations (COD)	—	—	■	■	■	—	—	■
Halogenide titrations (chloride, „salt“...)	—	—	■	■	■	—	—	■
Hydrogen sulphide and mercaptans	—	—	—	—	■	—	—	■
Sulfurous acid in wine and beverages	—	—	—	■	■	—	—	■
Bromine number	—	—	—	■	■	■	■	■
pH-stat-applications (enzyme kinetics, soil samples, biotechnology)	—	—	—	—	■	—	—	■
Water analysis according to KF Volumetric method (10 ppm –100 %)	—	—	—	—	—	■	—	■
Water analysis according to KF Coulometric method (1 ppm –5 %)	—	—	—	—	—	—	■	—
Applications with sample changer	—	—	—	—	■	—	—	■
Applications with TitriSoft	■	■	—	—	■	■	■	■

1) 20 and 50 ml dosing unit usable (no intelligent interchangeable units)
2) Can be used as titration and dosing burette in automatic titration systems


New from SIAnalytics:
TITRONIC®300 and TitroLine® 5000

The new Titration instruments

The new piston burette TITRONIC®300 and the automatic Titrator TitroLine® 5000 from SI Analytics, as successor of the very successful burette TITRONIC® *universal* and the titrator TitroLine® *easy*, convince with the well known easyhandling and innovative features.

TITRONIC®300
piston burette

Online titration curves:
(TitroLine®5000 only)

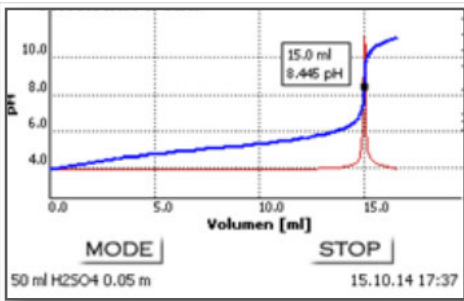

TitroLine®5000
titrator

Standard methods:

Default method		
Alkalinity (p+m)		
Chloride in %		
Chloride in mg/l		
COD Blank		
COD Sample		
COD Titer		
Dosing method		
dos ▼		
ESC	OK	
50 ml NaOH 0.1 m 10/20/14 11:54		

- Visibility: Full color display, including online curves that can be easily viewed from a distance and at extreme angles
- Includes two USB and two RS232 ports for expansion and connection of devices such as USB keyboard, USB-storage device, balance, PC and additional SIAnalytics peripherals
- Exports the results as PDF and CSV to a memory stick/USB device
- Transfer of methods via USB device
- Standard methods
- Daisy-chain capability

Advantages
TitroLine® 5000
TITRONIC® 300

TITRONIC®300 - the new piston burette from SIAnalytics

The TITRONIC®300 is a perfect motor-driven burette for manual titration and precise dosing instrument for dispensable liquids, solvents and titrating agents. However, the TITRONIC®300 is not only first-rate as a stand-alone instrument, it also thrives as the heart of a computer-controlled dosing or titrating system.

Manual Titration

It is true that the automatic titration is gaining ground, but manual titration remains one of the standard cost effective applications in the lab, wherever high precision and flexibility are required.

- ▶ Titration with hand controller (mouse).
- ▶ Titration rate can be adjusted in five different steps to optimize the titration speed and accuracy.
- ▶ Automatic calculation of results in different units and exportation to a printer or USB memory device.
- ▶ Automatic weight recording when a balance is connected.

Titration manually, perfectly dosing

Dosing

Beside the titration there are various routine dosing tasks that must be performed in the lab. A piston burette is the ideal device for precise dosing tasks:

- ▶ Adjustable dosing and filling rate for each method.
- ▶ Adjustable filling between each dose step.
- ▶ The intelligent filling function checks if a dosing step is feasible without filling in advance. This reduces faulty operations during a serial dosing process.

Titration is running
man Titration HCl

2.408 ml

Speed 3
Stop
20 ml

Device is filling
man Titration HCl

Consumption
HCl

2.950 ml
5.09 %

Back
Printing...

ESC
10/20/14 18:49



Edit dosing parameter
dose 12 ml

Dosing volume	12.000 ml
Dosing speed	100.00 %
Dosing speed	100 ml/min
Filling speed	30 s
Automatic filling	always

50 ml NaOH 0.1 m

Dose
dose 12 ml

5.019 ml
12.000 ml

STOP
50 ml NaOH 0.1 m

ESC
10/20/14 12:13

TitroLine® 5000 - the new automatic Titrator from SIAnalytics

The predecessor of the TitroLine® 5000, TitroLine® easy, has always been the first choice if you were looking for a very easy-to-use automatic titrator for any application. A special training or a deeper knowledge of automatic titration was not necessary to get precise and quick results. That and much more is exactly what the new TitroLine® 5000 stands for:


- High resolution pH/mV-measurement input for pH-, ORP-, silver- and further mV-electrodes
- Pt 1000 and NTC 30 temperature measurement input for automatic temperature compensation
- Pre-installed standard methods for FOS/TAC, alkalinity, total acidity in drinks, chloride etc.
- Linear and dynamic titration to equivalence points
- Titration to pH and mV-end points
- Same manual titration and dosing function as the piston burette TITRONIC®300



The easiest titration ever...


Typical applications of water/wastewater and environmental analysis

- pH-value, alkalinity (p+m-value)
- FOS/TAC (see titration curve and result screen as example)
- Total Kjeldahl nitrogen
- Permanganat index and COD
- Chloride in wastewater

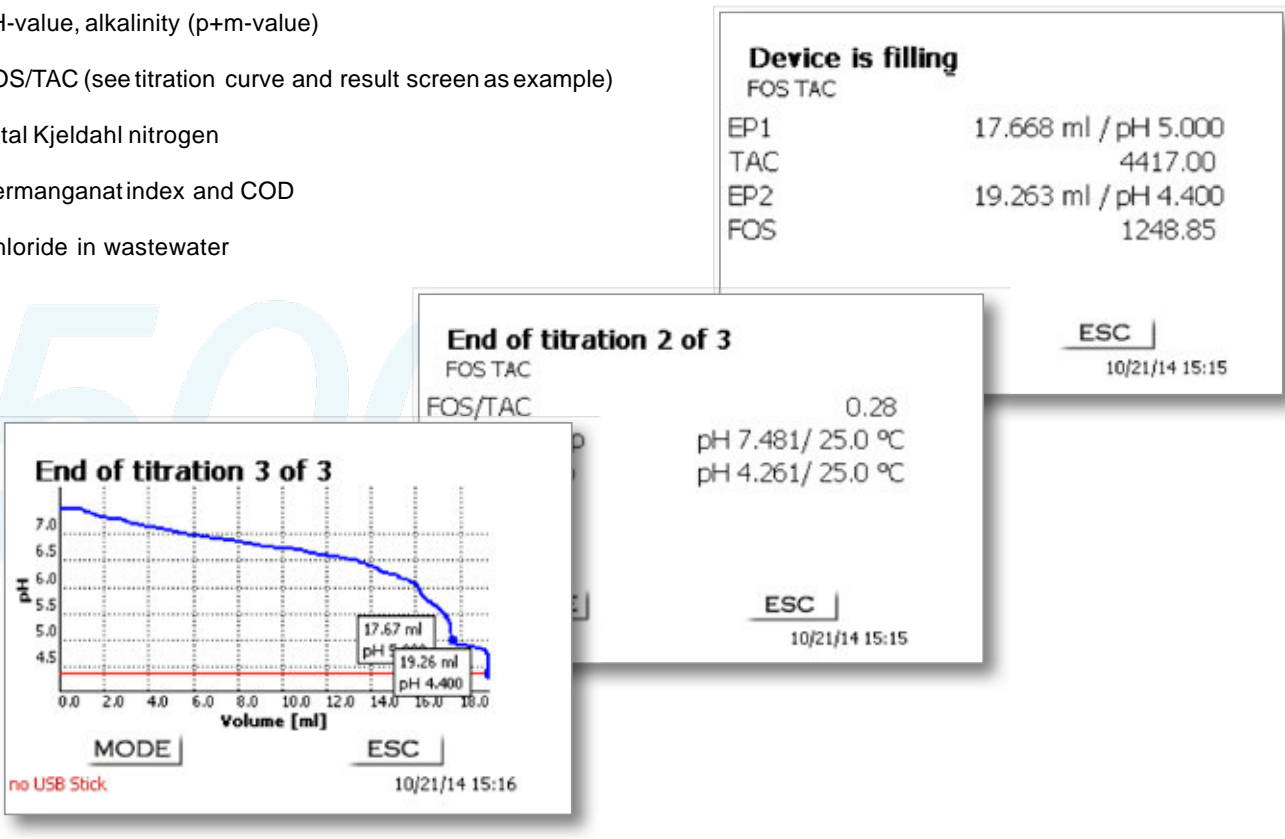

Typical applications of food analysis

- Salt content (chloride, sodium chloride, see titration curve as example)
- pH-value, total acidity in wine, drinks and other food products
- Ascorbic acid
- Protein determination (Kjeldahl-nitrogen in milk and dairy products)
- Iodine and peroxide value

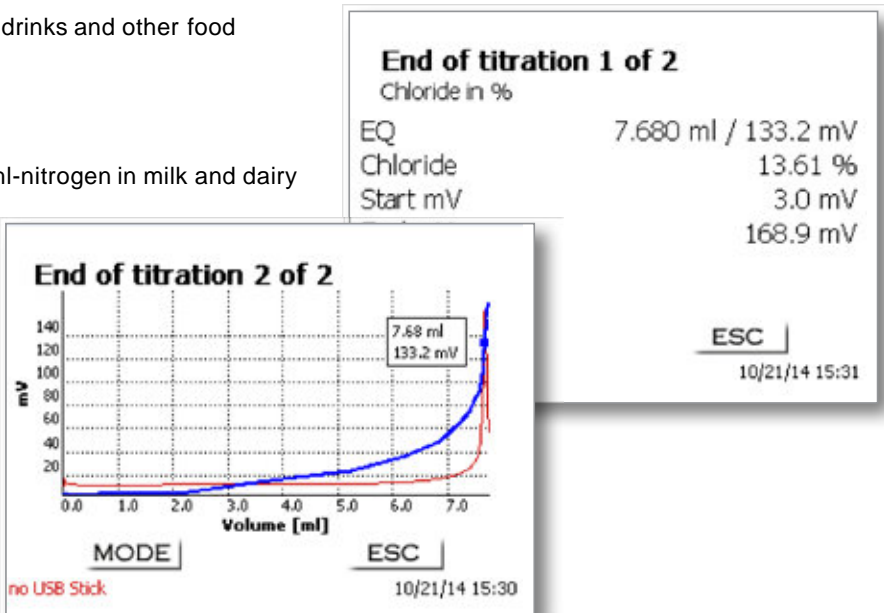

Specif cations - TITRONIC®300

Features	
Interfaces:	1 x USB-A and 1 x USB-B,2 x RS-232-C
Stirrer connection:	TM 50, power supply directly through piston burette
Keyboard:	The unit is operated using the keyson the device itself,the controller TZ3880 and optional PC-keyboard (USB)
Display:	graphics-capable TFT display.
Volume display:	0000,000...9999,999 ml
Display resolution:	0.005-0.025 ml (depending on dosing unit)
Dosing speed:	max. 100 ml/min (with 50 ml unit)
Filling speed	min 30 s to 999 sadjustable (time according to the cylinder volume)
Dosing units:	20 ml or 50 ml dosing unit, interchangeable
Burette resolution:	8000
Dosing accuracy:	systematicerror 0.15 %,random error 0.05 % in compliance with EN ISO 8655-6
Power supply:	100 -240 V~; 50/60 Hz, power input 30 VA
Conformity:	ISO 8655, part 6
CE-mark:	EMC: 2004/108/EG; safety EG- Directive 2006/95
Dimensions	135 x 310 x 205 mm (W x H x D), including dosing unit, without stirrer
Weight:	2 kg (without stirrer)
Ambient conditions	Ambient temperature: + 10 ... + 40 °C for operation and storage. Humidity according to EN61 010, Part1:Max. relative humidity 80 % for temperatures up to 31 °C, linear decrease down to 50 % relative humidity at a temperature of 40 °

Ordering information - TITRONIC®300

Type-No.	Order-No.	Description
T 300/20 M1	285225800	TITRONIC®300 without magnetic stirrer TITRONIC 300basic unit with ready to use assembled 20 ml dosing unit, manual controller, titration clamp, stand rod and power supply 100-240 V
T 300/50 M1	285225810	TITRONIC®300 without magnetic stirrer TITRONIC 300basic unit with ready to use assembled 50 ml dosing unit, manual controller TZ3880, titration clamp, stand rod and power supply 100-240 V
T 300/20 M2	285225820	TITRONIC®300 with magnetic stirrer TITRONIC 300basic unit with ready to use assembled 20 ml dosing unit, magnetic stirrer TM 50, manual controller, titration clamp, stand rod and power supply 100-240 V
T 300/50 M2	285225830	TITRONIC®300 with magnetic stirrer TITRONIC 300basic unit with ready to use assembled 50 ml dosing unit, magnetic stirrer TM 50, manual controller, titration clamp, stand rod and power supply 100-240 V

Accessories - TITRONIC®300

Type-No.	Order-No.	Description
TM 50	285225840	Magnetic stirrer
TZ 3835	285220410	USB-keyboard
TZ 3830	285220420	USB-HUB
TZ 3803	285220590	Reagent bottle, amber, 1l

Specif cations - TitroLine® 5000

Features	
Measurement input pH/mV:	pH/mV-input with Electrode socket according to DIN 19 262 or additional with BNC socket insert (Z 860)
Measurement input temperature.:	Pt 1000/NTC 30: (socket2 x 4 mm)
Interfaces:	1 x USB-A and 1 x USB-B,2 x RS-232-C
Stirrer connection:	TM 50 power supply directly through piston burette
Keyboard:	The unit is operated using the keyson the device itself,the controller TZ3880 and optional PC-keyboard (USB)
Display:	graphics-capable TFT display
Volume display:	0000,000...9999,999 ml
Display resolution:	0.005-0.025 ml (depending on dosing unit)
Dosing speed:	max. 100 ml/min (with 50 ml unit)
Filling speed:	min 30 s to 999 sadjustable (time according to the cylinder volume)
Dosing units:	20 ml or 50 ml dosing unit, interchangeable
Burette resolution:	8000
Dosing accuracy:	systematicerror 0.15 %,random error 0.05 % in compliance with EN ISO 8655-6
Power supply:	100 -240 V~; 50/60 Hz, power input 30 VA
Conformity:	ISO 8655, part 6
CE-mark:	EMC: 2004/108/EG; safety EG- Directive 2006/95
Dimensions	135 x 310 x 205 mm (W x H x D), including dosing unit, without stirrer
Weight:	2.3 kg (without stirrer)
Ambient conditions	Ambient temperature: + 10 ... + 40 °C for operation and storage. Humidity according to EN61 010, Part1: Max. relative humidity 80 % for temperatures up to 31 °C, linear decrease down to 50 % relative humidity at a temperature of 40 °

Ordering information - TitroLine®5000

Type-No.	Order-No.	Description
TL5000/20 M1	285225760	TitroLine®5000 with 20 ml dosing unit Basicunit without electrode, with ready to use assembled 20 ml dosing unit, manual controller, titration clamp, stand rod, magnetic stirrer TM 50 and power supply 100-240 V
TL5000/50 M1	285225770	TitroLine®5000 with 50 ml dosing unit Basicunit without electrode, with ready to use assembled 50 ml dosing unit, manual controller, titration clamp, stand rod, magnetic stirrer TM 50 and power supply 100-240 V
TL5000/20 M2	285225780	TitroLine®5000 with 20 ml dosing unit Basicunit with pH electrode and buffer set, with ready to use assembled 20 ml dosing unit, manual controller, titration clamp, stand rod, magnetic stirrer TM 50 and power supply 100-240 V
TL5000/50 M2	285225790	TitroLine®5000 with 50 ml dosing unit Basicunit with pH-electrode and buffer set, with ready to use assembled 50 ml dosing unit, manual controller, titration clamp, stand rod, magnetic stirrer TM 50 and power supply 100-240 V
TL5000/20 M3	285225850	TitroLine®5000 with 20 ml dosing unit Basicunit with Ag-electrode, with ready to use assembled 20 ml dosing unit, manual controller, titration clamp, stand rod, magnetic stirrer TM 50 and power supply 100-240 V

Accessories - TitroLine® 5000

Type-No.	Order-No.	Description
TZ 3835	285220410	USB-keyboard
TZ 3830	285220420	USB-HUB
TZ 3803	285220590	Reagent bottle, amber, 1l

What can Xylem do for you?

We're 12,700 people unified in a common purpose: creating innovative solutions to meet our world's water needs. Developing new technologies that will improve the way water is used, conserved, and re-used in the future is central to our work. We move, treat, analyze, and return water to the environment, and we help people use water efficiently, in their homes, buildings, factories and farms. In more than 150 countries, we have strong, long-standing relationships with customers who know us for our powerful combination of leading product brands and applications expertise, backed by a legacy of innovation.

For more information on how Xylem can help you, go to www.xyleminc.com

SI Analytics
a **xylem** brand

SI Analytics GmbH

Hattenbergstrasse 10
55122 Mainz
Germany

Phone: +49.(0)6131.66.5111
Fax: +49.(0)6131.66.5001
E-Mail: si-analytics@xyleminc.com
Internet: www.si-analytics.com

For customers in North America: SI Analytics

P.O. Box 9010
151 Graham Road
College Station, Texas 77842-9010
USA

Toll-free: 866-691-7954
Local: 979 690 5563
E-Mail: information.request@xyleminc.com
Internet: www.si-analytics.com

presented by

Camlab Limited

Camlab House, Norman Way Industrial Estate,
Over, Cambridge CB24 5WE, UK
E: sales@camlab.co.uk
T: +44 1954 233110



SI Analytics is a trademark of Xylem Inc. or one of its subsidiaries.

© 2014 Xylem, Inc. 980 085US Version 11/2014